



AFINIA LABEL®

L901

COLOR LABEL PRINTER

L901 Industrial Colour Label Printer

Powered by **memjet®**



Powerful in both roll-to-roll and inline applications


The L901 combines industrial design, exceptional image quality, and high production speeds with a new ability to service and maintain the printhead “on-the-fly.” This makes the L901 perfect for long roll-to-roll print jobs or inline integration with label finishers, applicators, dispensers, and more.

Producing vibrant full-colour prints in high resolution, the L901's new optimised ink formula delivers improved UV and water resistance, deeper blacks, and a longer printhead life. Large print volumes are now more economical, with five high-capacity 250ml CMYKK ink cartridges delivering an ultra-low cost per label.


Key Features

- ✓ Designed for easy integration
- ✓ On-the-fly printhead servicing
- ✓ Lower cost per print
- ✓ High speed & resolution

Optimised for these inline uses:



Presses / Finishers



Roll to Roll



Print & Apply

New Optimised CMYKK Ink Formula

Increased UV and water resistance with deeper blacks, all at a new lower cost of ownership

Touchscreen Operation

Easily store files, run and pause jobs, or perform maintenance tasks through a user-friendly interface

Industrial Build Quality

Designed for all-day operation—either roll-to-roll or inline—in a production environment

Professional Print Resolution

1600 DPI resolution delivers your jobs in style and on time, even with variable data



sales@afinia.co.uk
+44 (0) 845.250.7949
afinialabel.co.uk



AFINIA LABEL®

L901 Specifications

Printer:

Print method:	Memjet Waterfall Printhead Technology® 11 Integrated Circuit (IC) Chips – 70,400 nozzles
Inks:	Dye-based, 250mL CMYKK (1.25L total) — Water/UV resistant formula
Print resolution:	1600 x 1600 dpi – 1600 x 800 dpi
Print speed:	6 inches (152 mm) per second – 12 inches (305 mm) per second
Print width:	8.5 inches (216 mm)
Cutter/sheeter:	Powered

Media:

Media Size:	Width: 2"–9" (50.8 mm–229 mm) Length: 1"–48" (25.4 mm–1220 mm)	Media sensors:	Gap (movable), continuous, black mark
Thickness:	Minimum 0.005" (0.13 mm) Maximum 0.01" (0.3 mm, including liner)	Die-cut gap:	Minimum 0.125" (3.0 mm) Maximum 0.3" (8.0 mm)
Core diameter*:	Requires 3" (76.2 mm) cardboard core	Black mark:	3 mm wide, 25.4 mm long on left
Unwind/Rewind*:	12" (305 mm) outside diameter	Substrates:	Compatible with a wide range of paper, polyester, polypropylene, and vinyl label stocks

*with optional XL Unwind/Rewind system, shown below

General:


Interfaces:	USB 2.0, TCP/IP (Manual IP configuration or DHCP), GPIO available for external device control
Operating system:	Windows 7, 8, and 10 (32 and 64 bit)
Barcode font:	1D Barcode at least Grade B (Code39) with 10mils bar width
2D code printing:	2D Barcode at least Grade B (PDF417) with 10mils cell size
Operating temperature:	15°–35° C (59°–95°F) at RH 20–80%
Overall dimensions**:	22.5" (572 mm) W, 20.5" (521 mm) D, 14" (356 mm) H
Weight:	85 lbs. (38.5 kg)
Rated voltage:	AC 110V – 220V, auto-sensing
Warranty:	One year

Optional XL Unwind/Rewind System

For high-capacity roll-to-roll production. Visit our website or contact us for details.



**Dimensions with XL Unwind/Rewind System: 59.5" (1512 mm) W, 20.5" (521 mm) D, 23" (585 mm) H

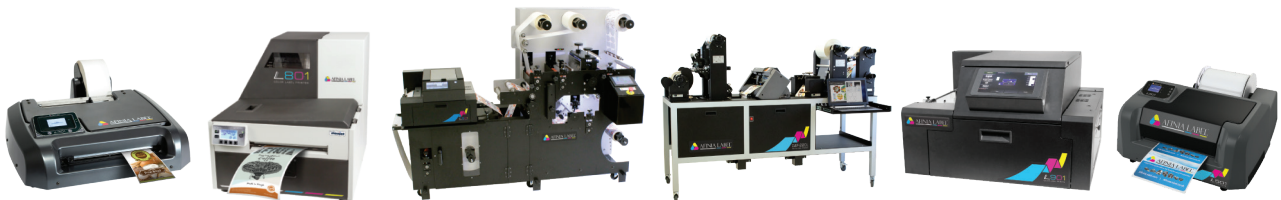

Label Printing Solutions for Every Level of Production
AfiniaLabel.co.uk



sales@afinia.co.uk
+44 (0) 845.250.7949
afinialabel.co.uk

AFINIA LABEL®