

Wax Standard Ribbons


Datasheet

- For general purpose usage and light direct contact or handling.
- Ideal for usage, in warehouses for bin and shelf-edge labelling or box-end packing.
- Toshiba approved for maximum productivity.

Our wax standard ribbons are designed to meet the varied and demanding standards of the current labelling industry. These wax ribbons will print onto a wide range of labels stocks, from uncoated to high gloss papers and synthetics, providing clear, sharp printed images of text and barcodes.

As one of Europe's biggest thermal transfer ribbon suppliers, we are committed to quality and reliability to help your business grow. Designed and manufactured to truly demanding industry standards, there is no better choice.

Like all our products, our consumables, too, are designed to improve printing efficiency, while at the same time reducing waste and minimising delivery and transportation costs. This not only saves you money, but also helps create a greener tomorrow.

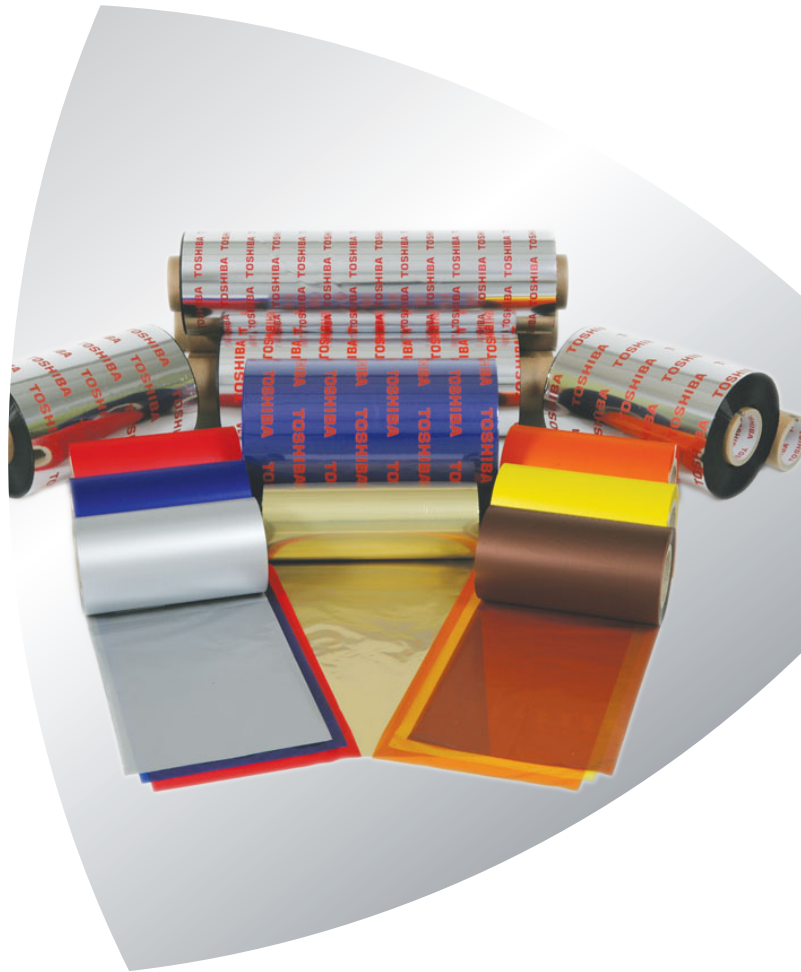

Specifications

Key features

- Excellent multi-receptor compatibility
- Good sensitivity and low energy
- Sharper printed images with good levels of blackness

AW1F

AW7F

	AW1F	AW7F
Melting point	65°C	65°C
Ribbon thickness	<8 µm	<9 µm
PET thickness	4.5 µm	4.5 µm
Backcoating	Silicon based	Silicon based
Max. Printing Speed	400 mm/s	400 mm/s
Colour	Black	Black, Red, Green, Blue, Gold
Storage	5-35°C 20-80% RH	5-35°C 20-80% RH
Blackness	2.1 ODR	2.2 ODR
Mecanical resistance	Low	Low
Heat resistance	60°C	60°C
Solvent resistance	Not recommended	Not recommended
Head Type	Flat	Flat

The specifications above are guidelines and vary depending on the substrates used. Contact us for an individual assessment. Using Toshiba ribbons ensures minimum wear on working parts and a better total cost of ownership (TCO). Protect your printhead life and warranty by using only Toshiba ribbons which are tailor-made for Toshiba thermal printers.

Toshiba Tec Netherlands

Duwboot 31
3991 CD Houten

Website

www.toshibatec.nl