

# EZ Industrial Printers



## EZ2250i / EZ2350i series

Model	EZ2250i	EZ2350i
Print Method	Thermal Transfer / Direct Thermal	
Resolution	203 dpi (8 dots/mm)	300 dpi (12 dots/mm)
Print Speed	7 IPS (177 mm/s)**	5 IPS (127 mm/s)**
Print Width	4.09" (104 mm)	
Print Length	Min. 0.16" (4 mm)**; Max. 100" (2540 mm)	Min. 0.16" (4 mm)**; Max. 45" (1143 mm)
Processor	32 Bit RISC CPU	
Memory Flash	8 MB Flash (4 MB for user storage)	
SDRAM	16 MB SDRM	
Interfaces	USB 2.0 (B-Type) Serial port: RS-232 (DB-9) IEEE 802.3 10 / 100 Base - TX Ethernet port (R -45) USB Host (A-Type)	

- Color TFT LCD and operation panel for easy and intuitive operation.
- USB Host for extension memory and standalone operation.
- All metal, industrial enclosure and print mechanism.
- Automatic self-adjustment for coated inside/outside ribbons.



### Suggested applications:



\*\* Specifications are subject to change without notice. Minimum print length and maximum print speed specification compliance can be dependent on non-standard material variables such as label type, thickness, spacing, liner construction, etc. GoDEX is pleased to test non-standard materials for minimum print height and maximum print speed capability.

# EZ Industrial Printers



## EZ6250i / EZ6350i series

Model	EZ6250i	EZ6350i
Print Method	Thermal Transfer / Direct Thermal	
Resolution	203 dpi (8 dots/mm)	300 dpi (12 dots/mm)
Print Speed	7 IPS (177 mm/s)**	5 IPS (127 mm/s)**
Print Width	6.61" (168 mm)	
Print Length	Min. 0.16" (4 mm)**; Max. 70" (1778 mm)	Min. 0.16" (4 mm)**; Max. 30" (762 mm)
Processor	32 Bit RISC CPU	
Memory Flash	8 MB Flash (4 MB for user storage)	
SDRAM	16 MB SDRAM	
Interfaces	USB 2.0 (B-Type) Serial port: RS-232 (DB-9) IEEE 802.3 10/100 Base-Tx Ethernet port (RJ-45) USB Host (A-Type)	

- Available for 200 dpi and 300 dpi resolution.
- Simple and intuitive LCD screen for immediate printer status. Perfect for standalone.
- Fast and effortless printhead assembly for efficient TPH switch.
- Automatic ribbon winding inside / outside detection. Easy to install and simple to use.



### Suggested applications:



\*\* Specifications are subject to change without notice. Minimum print length and maximum print speed specification compliance can be dependent on non-standard material variables such as label type, thickness, spacing, liner construction, etc. GoDEX is pleased to test non-standard materials for minimum print height and maximum print speed capability.

# ZX Industrial Printers



## ZX400/400i series

Model	ZX420	ZX420i	ZX430	Zx430i
Print Method	Thermal Transfer / Direct Thermal			
Resolution	203 dpi (8 dots/mm)		300dpi (12 dots/mm)	
Print Speed	6 IPS (152 mm/s)		4 IPS (102mm/s)	
Print Width	4.25" (108 mm)		4.16" (105,7 mm)	
Print Length	Min. 0.16" (4 mm)**; Max.157.44" 3999mm)		Min. 0.16" (4 mm)**; Max. 73.19" (1859 mm)	
Processor	32 Bit RISC CPU			
Memory Flash	128 MB Flash (60 MB for user storage)			
SDRAM	32 MB SDRM			
Interfaces	USB 2.0 (B-Type)	USB 2.0 (B-Type) Serial port: RS-232(DB-9) IEEE 802.3 10/100 Base-TX Ethernet port (RJ-45) USB Host (A-Type)	USB 2.0 (B-Type)	USB 2.0 (B-Type) Serial port: RS-232 (DB-9) IEEE 802.3 10/100 Base-Tx Ethernet port (RJ-45) USB Host (A-Type)

- Perfect combination of compactness and robustness.
- Quick maintenance with easy tool-less operation.
- Available for 200DPI and 300DPI resolutions.
- USB2.0, USB host, Serial port, Ethernet, optional WIFI & Bluetooth module for multiple applications.



### Suggested applications:



\*\* Specifications are subject to change without notice. Minimum print length and maximum print speed specification compliance can be dependent on non-standard material variables such as label type, thickness, spacing, liner construction, etc. GoDEX is pleased to test non-standard materials for minimum print height and maximum print speed capability.

# ZX Industrial Printers



## ZX1200i series

Model	ZX1200i	ZX1300i	ZX1600i
Print Method	Thermal Transfer / Direct Thermal		
Resolution	203 dpi (8 dots/mm)	300 dpi (12 dots/mm)	600 dpi (24 dots/mm)
Print Speed	Up to 10 IPS (254 mm/s)	Up to 7 IPS (177 mm/s)	Up to 4 IPS (101.6 mm/s)
Print Width	4.09" (104 mm) Up to (108 mm)	4.09" (104 mm) Up to (105.7 mm)	4.09" (104 mm) Up to (105.6 mm)
Print Length	Min. 0.16" (4 mm)**; Max. 180" (4572 mm)	Min. 0.16" (4 mm)**; Max. 85" (2159 mm)	Min. 0.16" (4 mm)**; Max. 26" (660 mm)
Processor	32 Bit RISC CPU		
Memory Flash	128 MB Flash (60 MB for user storage)		
SDRAM	32 MB SDRM		
Interfaces	USB 2.0 (B-Type) Serial port: RS-232(DB-9) IEEE 802.3 10/100 Base-TX Ethernet port (RJ-45) 3 USB Host (A-Type) 2 ports at the front panel, 1 port at the rear panel		

- Large intuitive touch screen LCD allows the user to be in control.
- Three USB host ports standard allows integration with several devices.
- High performance printer designed for high volume applications in mind Up to 10 IPS print speed.
- Optional Bluetooth & WIFI Module.



### Suggested applications:



\*\* Specifications are subject to change without notice. Minimum print length and maximum print speed specification compliance can be dependent on non-standard material variables such as label type, thickness, spacing, liner construction, etc. GoDEX is pleased to test non-standard materials for minimum print height and maximum print speed capability.

# ZX Industrial Printers




## ZX1000Xi series

Model	ZX1200Xi	ZX1300Xi
Print Method	Thermal Transfer / Direct Thermal	
Resolution	203 dpi (8 dots/mm)	300 dpi (12 dots/mm)
Print Speed	Up to 14 IPS (356 mm/s)	Up to 10 IPS (254 mm/s)
Print Width	4.09" (104 mm)	4.09" (104 mm) Up to (105,7)
Print Length	Min. 0.16" (4 mm)**; Max. 180" (4572 mm)	Min. 0.16" (4 mm)**; Max. 85" (2159 mm)
Processor	32 Bit RISC CPU	
Memory Flash	128 MB Flash (60 MB for user storage)	
SDRAM	32 MB SDRM	
Interfaces	USB 2.0 (B-Type) Serial port: RS-232(DB-9) IEEE 802.3 10/100 Base-TX Ethernet port (RJ-45) 3 USB Host (A-Type), 2 ports at the front panel, 1 port at the rear panel	

- Large intuitive touch screen LCD allows the user to be in control.
- Three USB host ports standard allows integration with several devices.
- High performance printer designed for high volume applications in mind. Up to 14 IPS print speed.



### Suggested applications:

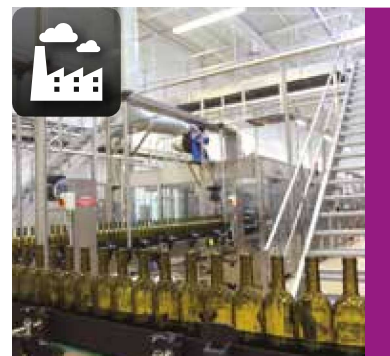

\*\* Specifications are subject to change without notice. Minimum print length and maximum print speed specification compliance can be dependent on non-standard material variables such as label type, thickness, spacing, liner construction, etc. GoDEX is pleased to test non-standard materials for minimum print height and maximum print speed capability.

# HD Industrial Printers



## HD830i(CS)

Model	HD830i	HD830i CS
Print Method	Thermal Transfer / Direct Thermal	
Resolution	300 dpi (12 dots/mm)	
Print speed	4 IPS (102 mm/s)	
Print Width	8.64" (219.5 mm)	
Print Length	Min. 1" (25.4 mm)** ; Max. 40" (1.016 mm)	
Processor	32 Bit RISC CPU	
Memory	Flash	128 MB Flash (60MB for user storage)
	SDRAM	32 MB
Interfaces	USB 2.0 (B-Type) Serial port: RS-232 (DB-9) IEEE 802.3 10/100 Base-Tx Ethernet port(RJ-45) USB Host (A-Type)	

- Duo-colored signal light with calibration button and intuitive 3.2" color touchscreen
- Robust metal casing and reliable mechanism to take on heavy duty jobs
- Optional wireless connectivity: Bluetooth or Wi-Fi module
- Extra memory for multiple applications
- External Label Stand : 10" Max. (Standard Package included)



### Suggested applications:



\*\* Specifications are subject to change without notice. Minimum print length and maximum print speed specification compliance can be dependent on non-standard material variables such as label type, thickness, spacing, liner construction, etc. GoDEX is pleased to test non-standard materials for minimum print height and maximum print speed capability.